
CIR-BB84T Weatherproof IR Camera



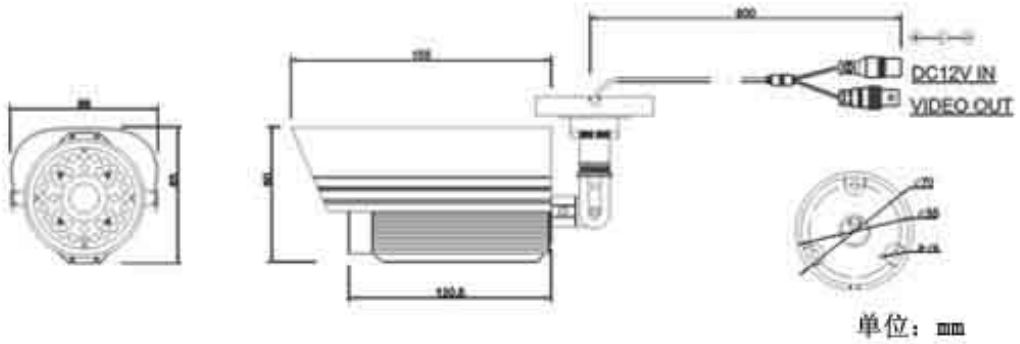

FEATURES:

1. 480TVL,1/3“ color Sony CCD
2. 6mm IR lens: no focus shift under IR light
3. Separate glass: no IR diffusion and fog
4. Color changes to B/W while IR LED starts working
5. Cable management: cable through bracket, fit for ceiling、Wall、base mount
6. Cable management: Strength vandal-resistance
7. Viewing angle: diagonal:53° / horizontal:42° / vertical:32°
8. Available IR distance: 35M

Remark: Non-regulative adaptor may cause camera damaged.

SPECIFICATION:

Item	CIR-BB84T
IP rating	IP66
Filter	Three Layers Crystal
Image Sensor	1/3" color Sony CCD
Pixels	NTSC:537(H)×505(V) PAL:537(H)×597(V)

Horizontal Resolution	480TVL
IR LED	35PCs IR LED
Vertical frequency	NTSC:60Hz PAL:50Hz
Horizontal Frequency	NTSC:15.734KHz PAL:15.625KHz
Clock Frequency	NTSC:28.636MHz PAL:28.375MHz
Scanning System	2:1 Interlace
S / N Ratio	≥50dB
Electronic Shutter	NTSC:1/60-1/100,000s PAL:1/50-1/100,000s
White Balance	Auto Tracking
Back Light Compensation	ON
Auto Gain Control	ON
Gamma	0.45
Video Output	1V p-p,75Ω
Lens	6mm IR Lens
Viewing Angle	Diagonal: 53° / Horizontal: 42° / Vertical: 32°
Power Supply	DC12V±10%
Current Consumption	330mA
Available IR Distance	35M
Dimension	155×88×83mm
Weight	810g
Storage Temperature	-30～+60℃
Operating Temperature	-30～+40℃

● ACCESSORIES:

User Manual ……X1
Screw…… X3
Plastic-Conical-Anchor……X3
Hexagonal Wrench ……X1
Bracket……X1

● Package:

Weight ……810g
Dimension ……. ……. 162×100×90mm
Quantity per carton ……..……12PCs
Dimension of carton…… ……550×330×440mm
Weight of carton……..……..…10.72KGs